




## Product Specification

930091-0012 Rev B

### HPW60M

Water Source Heat Pump  
For Water Heating

---

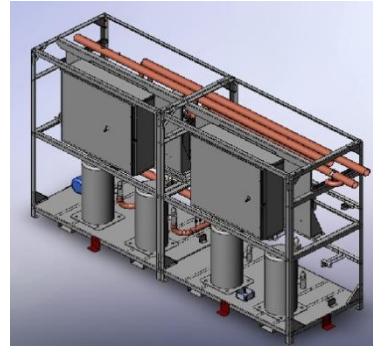

**General** - Colmac HPW water source heat pumps offer commercial and industrial users of potable hot water, an energy efficient means of heating water to temperatures as high as 160°F. The HPW uses waste heat in the form of any filtered, non-corrosive, pressurized stream of liquid.

Building hydronic loop water, return chilled water, condenser or cooling tower water, geothermal loops or wells, and industrial process water are a few of the possible heat sources that can be utilized by the HPW heat pump.

Depending on the temperature of the waste heat source, the HPW can produce potable hot water for as little as 1/4 the energy used by a conventional boiler or electric resistance heater.

These packaged water-source water heating pumps are factory wired, charged, and tested. Low operating noise levels, high capacity, high efficiency, and environmentally safe refrigerants are integrated into this new design.

---

#### General Specifications:

- Water Heating Capacity \*: 876.4 MBH
- Cooling Capacity \*: 668.0 MBH
- Source Water Flow Rate \*: 135 GPM
- Heating COP \*: 4.4
- Cooling COP \*: 3.4


\* 70°F Potable Water Inlet, 140°F Potable Water Outlet, 70°F Source Water

#### Standard Features:


- Environmentally friendly R134a refrigerant.
  - Copeland scroll compressors.
  - Vented, double wall, stainless steel, brazed plate condensers (potable water).
  - Single wall, stainless steel, brazed plate evaporators (source water).
  - Adjustable TXV, moisture indicating sight glass, liquid line filter drier.
  - Electronic temperature control valve (e-TCV™)
  - Source water flow switch and freeze stat.
  - Suction and discharge line vibration reducers.
  - Suction accumulator with liquid line heat exchanger.
  - Automatic controls include high and low pressure cutouts, oil press safety switch, compressor time delay relay, normal run and fault indicating lights.
-

Performance Data


**HPW60M Heating Capacity vs. Source Water Temperature**

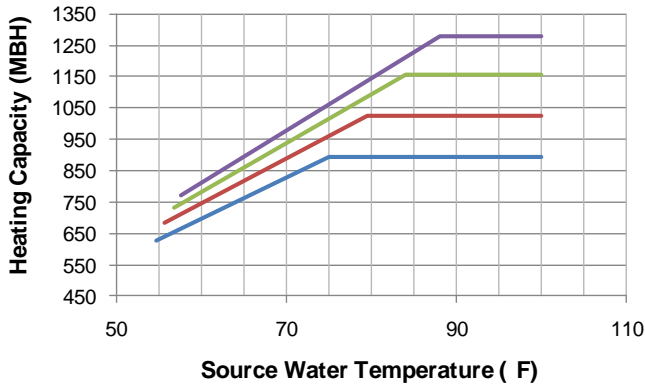


**HPW60M Cooling Capacity vs. Source Water Temperature**

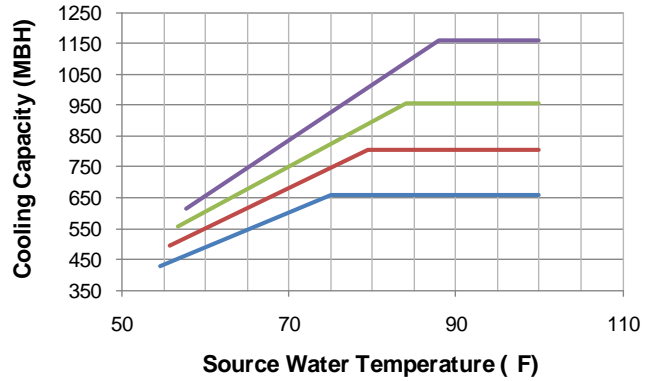

**HPW60 Heating COP vs. Source Water Temperature**

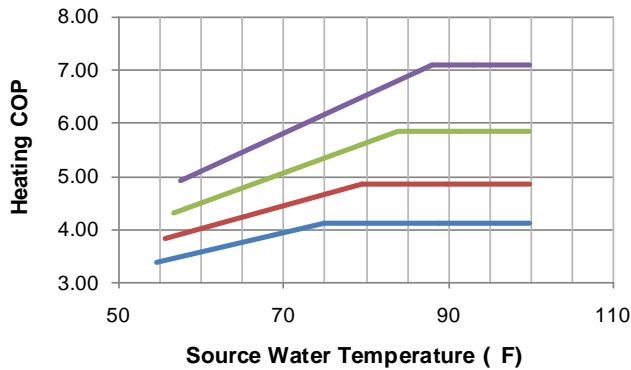


**HPW60 Cooling COP vs. Source Water Temperature**

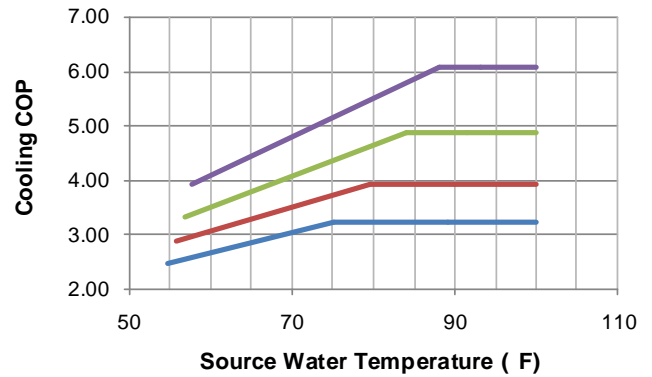

Note: Based on entering potable water temperature of 70°F.  
 Source water pump not included in calculations.  
 Based on 135 GPM source water flow rate.

### Unit Dimensions

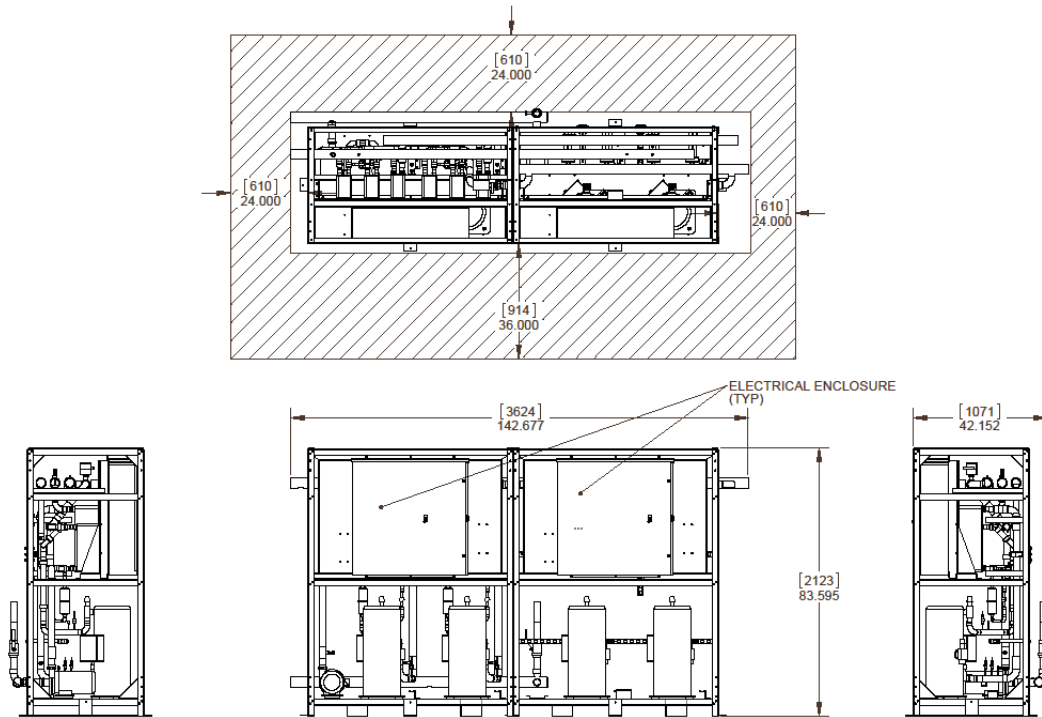

### Unit Weight

Dry Weight: 3000 Lbs.

### Electrical Data

Line Voltage	Rated Load Amps (RLA)	Locked Rotor Amps (LRA)
208-230/60/3	130 A	610 A
460/60/3	62.9 A	305 A

(Per compressor module, 2 modules total)



Colmac reserves the right to change product design and specifications without notice.

For more information on Colmac products call us at 1-800-926-5622 or visit us online at:

[WWW.COLMACWATERHEAT.COM](http://WWW.COLMACWATERHEAT.COM)