

**Submission Data: 12RLS3
Inverter Driven Heat Pump**

12,000 BTU Wall Mount

Job Name: _____

Date: _____

Location: _____

Approval: _____

Engineer: _____

Construction: _____

Submitted to: _____

Unit #: _____

Submitted by: _____

Drawing #: _____

Reference: _____

General Features

- Wired or wireless remote
- Energy saving program
- High performance heating
- Sleep timer
- 24-hour timer
- Weekly timer
- Dry mode
- Powerful mode
- Standard Warranty: 5 years parts, 7 years compressor. Applies to systems purchased before June 1st 2015*
- Extended Warranty: 10 years parts, 10 years compressor. Systems that have been installed on or after June 1st 2015 by licensed contractors and the online Product Registration has been submitted.**
- Elite Contractor Extended Warranty: 12 years parts, 12 years compressor. Systems that have been installed on or after June 1st 2015 by contractors who have met requirements and have been approved for elite contractor status plus, the online Product Registration has been submitted.***

Model Information

Condenser..... AOU12RLS3

Evaporator..... ASU12RLS3

Available Voltage Range..... 208/230V AC 1ph-60Hz

Minimum Circuit Ampacity..... 13.4 A

Max Fuse Size..... 15 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Max Starting Current..... 4.7 A

Operation Temperature Range

Cooling..... 14°F (-10°C) to 115°F (46°C)

Heating..... -5°F (-21°C) to 75°F (24°C)

Efficiency

SEER..... 29.3

EER (cooling)..... 4.46 kW/kW

COP (heating)..... 4.64 kW/kW / 15.8 Btu/hW

HSPF (heating)..... 14.0 Btu/hW

Enclosure

Condenser..... Painted galvanized steel

Material..... Beige (10 YR 7.5/1.0 NN)

Color..... Beige (10 YR 7.5/1.0 NN)

Evaporator..... Polystyrene

Material..... White (Approximate color of Munsell 5PB 9.25/0.5)

Color..... White (Approximate color of Munsell 5PB 9.25/0.5)

Sound Pressure Level

Condenser..... 47 dB (A)

Evaporator..... 42 dB (A)

Dimensions (H x W x D)

Condenser in. (mm)..... 24-1/2 (620) x 31-1/8 (790) x 11-7/16 (290)

Evaporator in. (mm)..... 11-5/8 (295) x 37 (940) x 10-5/8 (270)

Connection Pipe

Liquid..... 1/4" / 6.35 mm Flare

Gas..... 3/8" / 9.52 mm Flare

Method (Liquid/Gas)..... Brazing

Max Length (Pre-charge)..... 65 ft. (20 m) / (49 ft. {15 m})

Max Height Difference..... 49 ft. (15 m)

Drain Hose..... Ø 9/16 (Ø13.8) (I.D.) Ø5/8 to Ø11/16 (Ø15.8 to Ø16.7) (O.D.)

Weight

Condenser..... 84 lbs. (38 kg)

Evaporator..... 31 lbs. (14 kg)

Accessories

UTY-RNNUM^..... Wired remote control

UTY-RVNUM^..... Wired remote control (backlit, shows room temp.)

UTY-RSNUM^..... Wired remote control (simple)

UTY-XWZZZ5..... Dry contract kit

UTY-TWBXF1..... Interface kit

*1 Requires interface kit # UTY-TWBXF1 in order to connect these devices to them.







Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.44°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.
Heating: Indoor temperature of 70°F (21.1°C) DB/59°F (15°C) WB, and outdoor temperature of 47°F (8.33°C) DB/43°F (6.11°C) WB.
Pipe length: 24ft. 7in. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit)
(*Standard warranty / **10 year warranty / ***12 year warranty)



Dimensions: 12RLS3

[Unit: in. (mm)]

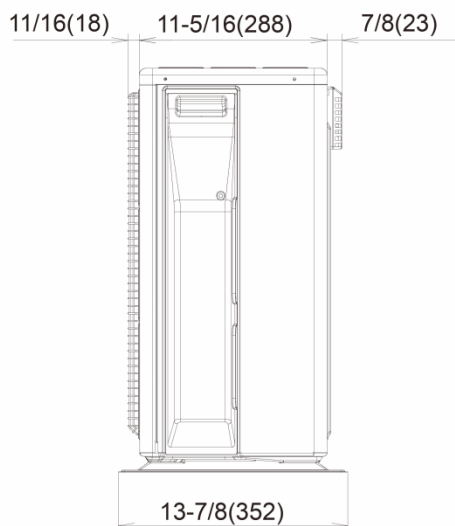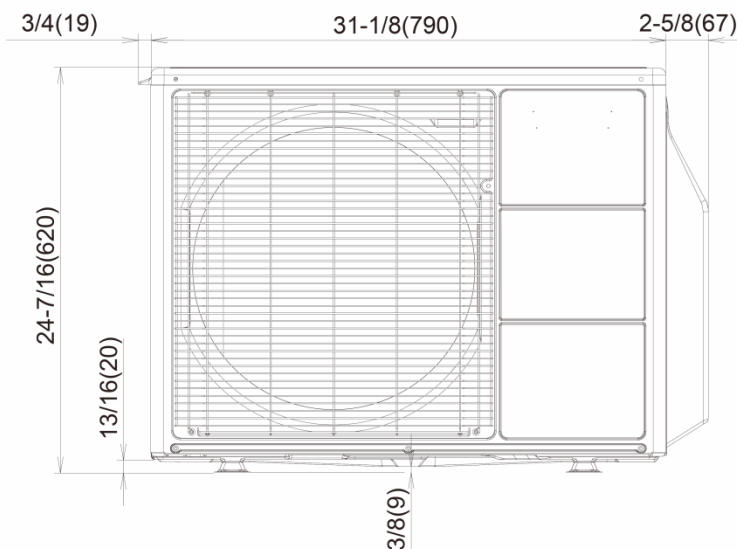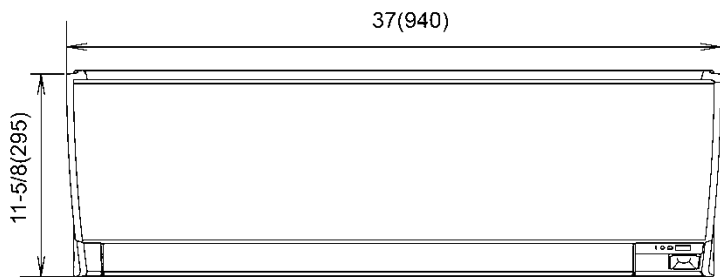

Front view

Side view

