

Submittal Data: System 18RULX ABU18RULX & AOU18RLX



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

Capacities:

Cooling	17,800 BTU/h
Min/Max Cooling	5,000-21,600BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	21,500 BTU/h
Min/Max Heating	5,000-25,600BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	8.5
SEER	16.0
EER <i>Cooling/Heating</i>	10.9/9.6
Low Ambient Temp. <i>F° Cooling/Heating</i>	0/14
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L</i>	43/39/35
Noise Level Heating <i>db (A) - H/ M/ L</i>	43/39/35
Weight	62 lbs.

Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	51/53
Recommended Fuse Size	20A
Min. Ampacity	15.4A
Running Current Cooling (<i>Rated/Max</i>)	7.1/12.5
Running Current Heating (<i>Rated/Max</i>)	9.8/12.5
Weight	141 lbs.

Refrigerant Piping:

Max Ht. Difference	66 ft.
Max Total or Combined Length	165 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Note: Figures are based on 230 Volts

OUTLINE AND DIMENSIONS

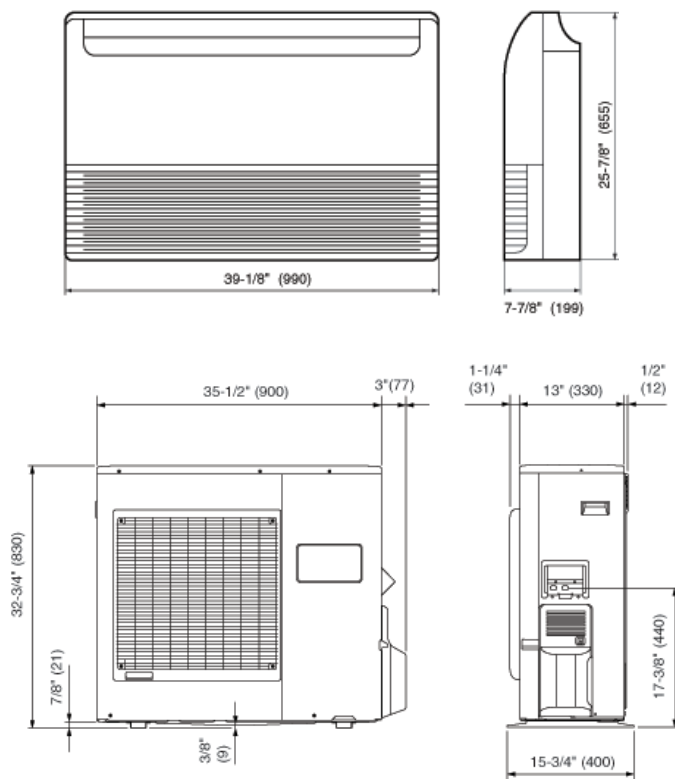

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Wireless Remote Control
- ◆ Auto Louver: 4 Way
- ◆ Energy saver
- ◆ Refrigerant R410A
- ◆ Optional Wired Remote Control
- ◆ 24 Hour Timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Auto Mode; Dry Mode
- ◆ Fresh Air Intake
- ◆ Cold Prevention
- ◆ Pump Down Operation

Notes:
